


Cisco TelePresence Video Communication Server Expressway

Extending video communications securely beyond the enterprise

Product Overview

Figure 1. Cisco TelePresence Video Communication Server Expressway Firewall Traversal (simple deployment)

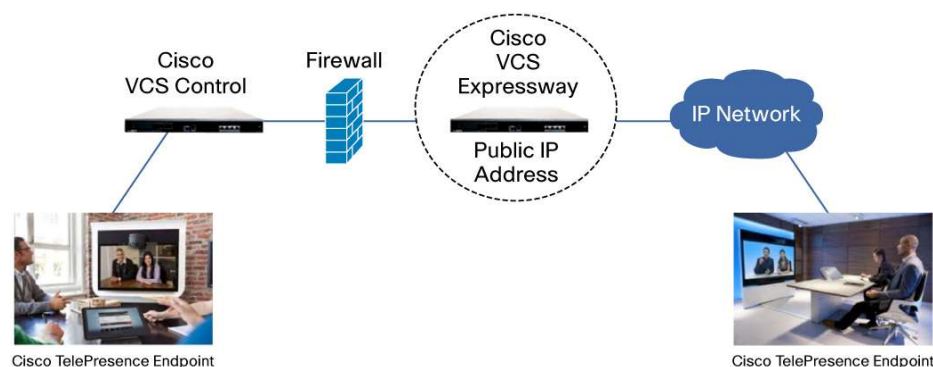

The Cisco TelePresence[®] Video Communication Server Expressway (Cisco VCS Expressway) deployed with the Cisco TelePresence Video Communication Server (Cisco VCS) enables smooth video communications easily and securely outside the enterprise.


The Cisco VCS Expressway enables business-to-business video collaboration, improves the productivity of remote and home-based workers, and enables service providers to provide video communications to customers. The application performs securely through standards-based and secure firewall traversal for all Session Initiation Protocol (SIP) and H.323 devices (Figures 1 and 2). As a result, organizations benefit from increased employee productivity and enhanced communication with partners and customers.

The Cisco VCS Expressway uses an intelligent framework that allows endpoints behind firewalls to discover paths through which they can pass media, verify peer-to-peer connectivity through each of these paths, and then select the optimum media connection path, eliminating the need to reconfigure enterprise firewalls.

Administrators have a choice of implementing the Cisco VCS Expressway either as an appliance or as a virtualized application on VMware or similar virtual environments, with additional support for Cisco Unified Computing System[™] (Cisco UCS[™]) platforms.

The Cisco VCS Expressway is built for high reliability and scalability, supporting multivendor firewalls, and it can traverse any number of firewalls regardless of SIP or H.323 protocol.

Figure 2. Cisco VCS Expressway Firewall Traversal (complex deployment)

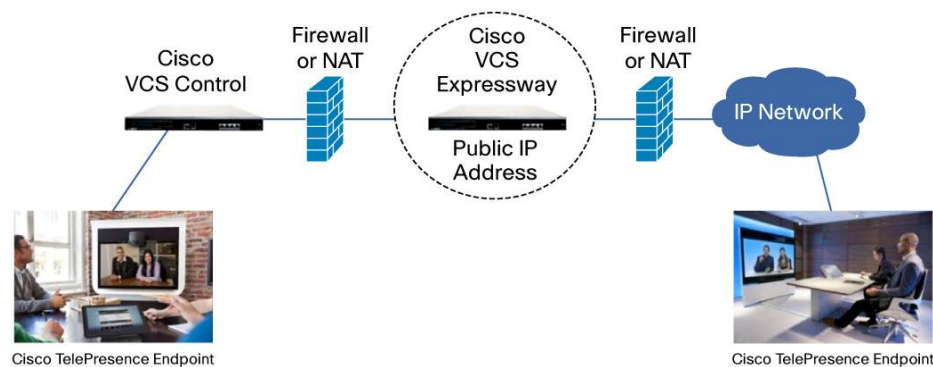

Benefits of Cisco VCS Expressway follow:

- **Advanced firewall traversal:** The Cisco VCS Expressway traverses any number of firewalls, making it easy for enterprises to collaborate more closely with external partners and suppliers.
- **Optimal media routing:** The Cisco VCS Expressway offers Simple Traversal of User Datagram Protocol Through Network Address Translation (STUN)-compliant firewall traversal, which provides endpoints with an intelligent framework to determine the best path for media connectivity.
- **Increased competitiveness:** The Cisco VCS Expressway helps enterprises become more competitive through real-time video communications across geographically dispersed teams.
- **Improved productivity:** The Cisco VCS Expressway empowers remote and home-based workers to collaborate more effectively with colleagues while helping cut travel costs.
- **Robust security:** The Cisco VCS Expressway uses standards-based device authentication for easier control over the network and safeguards external video communications.
- **Flexibility:** Administrators can implement the Cisco VCS Expressway either as an appliance or as a virtualized application to meet the needs of their organizations.

Features of the Cisco VCS Expressway follow:

- **Firewall traversal services for SIP and H.460.18/19:** The Cisco VCS Expressway offers all the functions of Cisco VCS Control. However, its main feature is that it acts as a firewall traversal server for other Cisco networks and any traversal-enabled endpoints that are registered directly to it. The Cisco VCS Expressway uses SIP or H.460.18/19 for firewall traversal of signaling and media across a range of ports.
- **Registration of traversal-enabled endpoints:** The Cisco VCS Expressway can register traversal-enabled endpoints directly for firewall traversal. You can configure the endpoints with a range of firewall traversal preferences such as protocols, ports, registration attempts, and keepalive intervals.
- **Traversal Using Relays for NAT (TURN) relay services:**
 - The Cisco VCS Expressway provides TURN relay services to Interactive Connectivity Establishment (ICE)-enabled endpoints to allocate relays for the media components of the call. The endpoints perform connectivity checks through ICE to determine how they will communicate.
 - For communications between the VCS and external Microsoft Office Communication Server (OCS) and Microsoft Lync clients that are registered through a Microsoft Edge Server, a Back to Back User Agent for Microsoft OCS and Microsoft Lync must be used.

- **Call-routing services:** The Cisco VCS Expressway supports a wide range of call-routing services, including alphanumeric Uniform Resource Identifier (URI) dialing. Additionally, the Cisco VCS Expressway can take advantage of the Domain Name System (DNS) Service Record (SRV) configuration to advertise availability to parties outside the local network, creating a rich peer-to-peer capability.
- **Policy engine for processing calls:** The Cisco VCS Expressway allows administrators to set system wide policies that determine how incoming or outgoing calls should be allowed, rejected, or redirected to a different destination based on criteria such as time of day, source or destination address, or more complex algorithms.

Optional features of Cisco VCS Expressway follow:

- Cisco TelePresence FindMe
- Cisco TelePresence Multiway
- Dual network interfaces
- Microsoft OCS 2007 Enhanced Interoperability option

Capacity of one Cisco VCS Expressway follows:

- Up to 2500 registrations
- Up to 500 nontraversal calls
- Up to 100 traversal calls
- Up to 1000 subzones
- Up to 1000 neighbor zones

Capacity of a cluster of six Cisco VCS Expressways follows:




- Up to 10,000 registrations
- Up to 2,000 nontraversal calls
- Up to 400 traversal calls

Table 1 lists the features and benefits of Cisco VCS Expressway.

Table 1. Features and Benefits

Feature	Benefit
User interface	<ul style="list-style-type: none"> • The web interface supports Internet Explorer 7, 8, and 9; Firefox 3 and later; and Chrome.
Supported telepresence endpoints	<ul style="list-style-type: none"> • Cisco VCS Expressway is compatible with any standards-compliant H.323 or SIP videoconferencing or telepresence device. Provisioning and configuration are supported only for Cisco TelePresence endpoints.
Management interfaces	<ul style="list-style-type: none"> • Support for industry standards such as HTTP and Secure HTTP (HTTPS), XML, Simple Network Management Protocol (SNMP v1, v2, and v3), Secure Copy Protocol (SCP) and Secure Shell (SSH) Protocol • Embedded setup wizard for initial configuration • Integration with Cisco TelePresence Management Server (TMS) Version 12.5 or later • Support for call logging and diagnostics
Architecture (Cisco VCS Expressway Appliance)	<ul style="list-style-type: none"> • Secure appliance-based architecture • Flash memory and hard drive

Feature	Benefit
Traversal services	<ul style="list-style-type: none"> • Cisco TelePresence Expressway technology • STUN discovery and STUN relay services • Firewall traversal STUN-compliant • H.460.18/19-compliant • H.460.18 client-proxy support • Support for H.460.19 multiplexed media • SIP support
Resilience and reliability	<ul style="list-style-type: none"> • Ability to deploy Cisco VCS Expressway in a redundant (six) cluster • Ability to share licenses across a cluster • Ability for registrations to survive system restart • Ability to replicate configuration for clusters • Ability for the Cisco VCS Expressway process to recycle within seconds • Support for Cisco VCS Expressway H.225 Alternate Gatekeeper
Session control and registrations	<ul style="list-style-type: none"> • Support for manual registration of H.323 and SIP endpoints • Support for H.225/Q.931, H.245 call-control routed mode, and non-call routed mode • Support for H.323-SIP Interworking Encryption • Support for H.323-SIP Interworking DuoVideo • Support for registration of H.323 ID and E.164 aliases and services • Support for Unicode (UTF-8) registration for global implementation • Support for URI dialing • Support for direct call signaling among neighbored Cisco VCSs, border controllers, and gatekeepers • Support for call policy management (RFC 3880), including call policy and user policy (Cisco TelePresence FindMe) • Support for conference hunting for multipoint-control-unit (MCU) cluster • Support for call routed mode • Support for call loop detection
Zone control and bandwidth management	<ul style="list-style-type: none"> • Support for remote zone monitoring • Support for remote zone redundancy • Support for up to 200 neighbor zones (including Cisco VCSs, border controllers, gatekeepers, and SIP proxies) • Support for subzone area definition for bandwidth management • Support for flexible zone configuration with named zones and default zone • Support for forwarding of requests to neighbor zones • Support for registration control (open, specifically allow, and specifically deny) • Support for interzone bandwidth management: Definable call by call <ul style="list-style-type: none"> ◦ Maximum bandwidth per call ◦ Maximum aggregate bandwidth for all neighboring zones • Support for intrazone bandwidth management: Definable call by call <ul style="list-style-type: none"> ◦ Maximum bandwidth per call ◦ Maximum aggregate bandwidth • Support for auto-down-speeding if call exceeds per-call maximum • Support for gateway load balancing • Support for automatic network failover • Support for capacity warnings for users and administrators
Language	<ul style="list-style-type: none"> • English
Physical dimensions (H x W x D)	<ul style="list-style-type: none"> • 1.72 x 16.8 x 18 in. (43.5 x 426 x 457.2 mm) • 1-rack unit (1RU) rack-mount chassis
Interfaces	<ul style="list-style-type: none"> • Four 10/100/1000 BASE-TX Ethernet ports (RJ-45) (front) • One RS-232 console port (RJ-45) (front)
Weight	<ul style="list-style-type: none"> • 17.6 lb (8 kg) (unpacked)
Power	<ul style="list-style-type: none"> • Auto-sensing 250W (maximum) 580 BTU per hour power supply • 90-264 VAC full range at 47-63 Hz

Feature	Benefit
Cooling system	<ul style="list-style-type: none"> • Five 40-millimeter fans for system cooling
System control and indications	<ul style="list-style-type: none"> • One power LED • One alarm LED • One power on/off switch (rear) • Four act/link/10/100/1000 LEDs on Ethernet ports
Environmental data	<ul style="list-style-type: none"> • Operating temperatures: 32 to 104°F (0 to 40°C) • Storage temperatures: -4 to 140°F (-20 to 60°C) • Relative humidity: 10 to 90% (noncondensing)
Servers for virtual environment	<ul style="list-style-type: none"> • Cisco UCS C200 M2, UCS C210 M2, or UCS B200 M2 servers
Certification	<ul style="list-style-type: none"> • LVD 73/23/EC • EMC 89/366/ECC  <p>Note: Cisco VCS Version X7 is ICSA Labs certified.</p>
Awards	 
Approvals and compliance	<ul style="list-style-type: none"> • Directive 73/23/EEC (Low Voltage Directive) • Standard EN 60950 • Directive 89/336/EEC (EMC Directive) • Standard EN 55022, Class A • Standard EN 55024 • Standard EN 61000-3-2/-3-3 • Approved according to UL 60950 and CAN/CSA C22.2 No. 60950 • Compliance with FCC15B Class A • Joint Interoperability Test Command (JITC)

Product Specifications

Table 2 lists the network, management, and security specifications of Cisco VCS Expressway.

Table 2. Network, Management, and Security Specifications

Network	<ul style="list-style-type: none"> • Support for DNS addressing • Support for IPv4 and IPv6 simultaneously • IPv4 and IPv6 translation services
Interfaces	<ul style="list-style-type: none"> • Four 10/100/1000 BASE-TX Ethernet ports (RJ-45) (front) • One RS-232 console port (RJ-45) (front)
Supported RFCs	<ul style="list-style-type: none"> • RFCs 2543, 3261, 3264, 1889, 3265, 3325, 3515, 3891, 3892, 2327, 4566, 5626, 5627, 5389, and 5766

Security	<ul style="list-style-type: none"> • Secure management with HTTPS, SSH, and SCP • Secure file transfer • Inactivity timeout • Ability to lock down IP services • Authentication required on HTTP(S), Telnet, SSH, and SCP • H.235 authentication support • Transport Layer Security (TLS) for SIP signaling • Roles-based password-protected GUI user access • Ability to enforce strict passwords • Ability to disable root access over Telnet or SSH
Management	<ul style="list-style-type: none"> • Support for industry standards such as Telnet, HTTP(S), XML, SNMP, SCP, and SSH • Embedded setup wizard for initial configuration • Advanced management support and configuration with Cisco TMS 12.6 or later • Call logging and diagnostics • Local time-zone aware • Port usage tool

Ordering Information

To order Cisco VCS Expressway, visit the [Cisco Ordering Home Page](#) and refer to Table 3.

Table 3. Ordering Information for Cisco VCS Expressway

Product Name	Part Number	Compliance Model Number
Cisco TelePresence Video Communication Server Expressway (VCS Expressway Appliance) Comes with: Cisco TelePresence Video Communication Server, Expressway feature, Gateway Feature, 1800 TURN Relay Option, Cables Note: A minimum of 5 traversal licenses must be selected when ordering the VCS Expressway Appliance	CTI-VCS-EXPRESS-K9	TTC2-04
Cisco TelePresence Video Communication Server Expressway (Virtualized Application) Comes with: Cisco TelePresence Video Communication Server, Expressway Feature, Gateway Feature, 1800 TURN Relay Option, VCS-Dual Network Interface Feature Note: A minimum of 5 traversal licenses must be selected when ordering the VCS Expressway Virtualized Application	R-VMVCS-EXPWY-K9	TTC2-04
Ordering Options for the Cisco VCS Expressway		
5 Traversal Calls for Cisco VCS Expressway	LIC-VCSE-5	N/A
10 Traversal Calls for Cisco VCS Expressway	LIC-VCSE-10	N/A
20 Traversal Calls for Cisco VCS Expressway	LIC-VCSE-20	N/A
50 Traversal Calls for Cisco VCS Expressway	LIC-VCSE-50	N/A
Additional 10 Non-traversal calls for Cisco VCS Expressway	LIC-VCS-10	N/A
Additional 20 Non-traversal calls for Cisco VCS Expressway	LIC-VCS-20	N/A
Additional 50 Non-traversal calls for Cisco VCS Expressway	LIC-VCS-50	N/A
Additional 200 Non-traversal calls for Cisco VCS Expressway	LIC-VCS-200	N/A
Additional 300 Non-traversal calls for Cisco VCS Expressway	LIC-VCS-300	N/A
Enable Device Provisioning for Cisco VCS	LIC-VCS-DEVPROV	N/A
VCS-Dual Network Interface for Cisco VCS Expressway (VCS Expressway Appliance Only)	LIC-VCS-DI	N/A
VCS FindMe Application for Cisco VCS Expressway	LIC-VCS-FINDME	N/A
VCS Enhanced OCS Collaboration	LIC-VCS-OCS	N/A

Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco Services can help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, visit [Cisco Technical Support Services](#) or [Cisco Advanced Services](#) online.

For More Information

For more information about the Cisco Video Communication Server Expressway, please visit <http://www.cisco.com/go/telepresence> or contact your local Cisco account representative or authorized Cisco partner. Product specifications are estimates and subject to change without notice.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)