**Description:**

The Weatherproof Dome consists of a black upper dome and a clear, smoked, or black acrylic lower dome. The upper dome has a sealed flange for mounting to an optional wall or ceiling mount. An adjustable camera mounting plate is provided to properly position a pan/tilt video camera within the dome configuration.

Specifications:**Power Supply - Regulated Output**

Input: 24VAC-100VA when using heater & blower
Output: Camera - 24VAC, 9-18VDC, max 1.2amp at 70°F
 Blower - 12VDC
Protection: 2 amp, 250V Fuse Protection
 Surge Protection

Blower

12VDC, 1 Watt 15 cfm
 Continuous Duty

Heater Board


24VAC, 40 Watt heater
 Thermostat activates at 39°F ± 3°F
 24VAC camera output

Options:


Model Number	Description	Input	Intensity	Temperature
CAM-WPDM	Environmental Dome	24VAC, 40VA	N/A	32°F to 86°F
CAM-WPDM-B	Dome with Blower	24VAC, 75VA	1 Watt, 15 cfm	14°F to 120°F
CAM-WPDM-HB	Dome with Heater & Blower	24VAC, 100VA	41 Watts	-22°F to 120°F

For required lower dome color add the following to the part number:


C: Clear S: Smoked P: Black

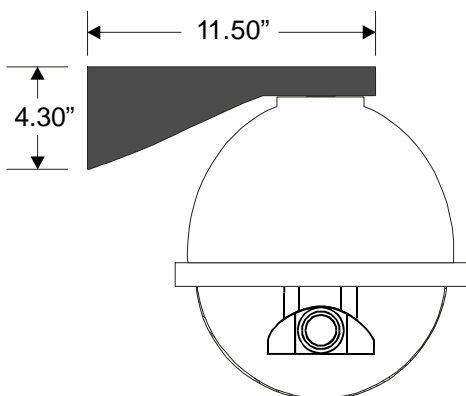Optional Mounting Brackets


Wall Mounting Bracket
CAM-WPDM-WMB

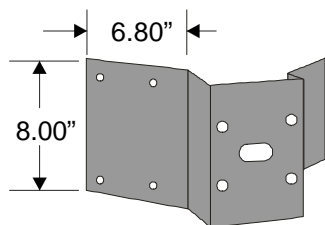

Corner Adapter for
Wall Mounting Bracket
CAM-WPDM-CA



Pipe Adapter for
Wall Mounting Bracket
CAM-WPDM-PA

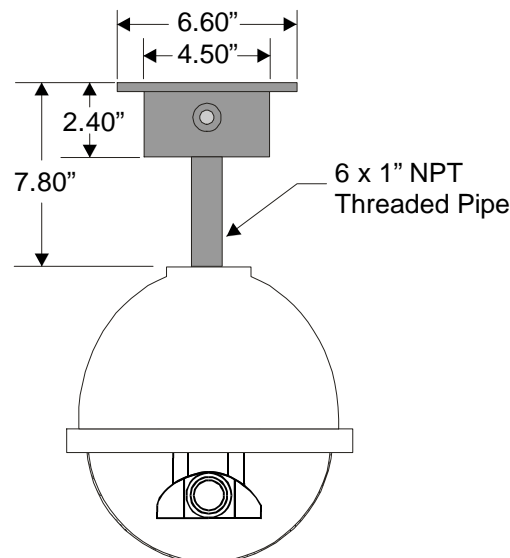

Ceiling Mounting Bracket
CAM-WPDM-CMB

Specifications and features subject to change without notice.

Telemetry Inc.

6 Leighton Place
 Mahwah, New Jersey, U.S.A. 07430
 Phone: (201)848-9818 Fax: (201)848-9819
 www.telemetryinc.com

7/03 printed in U.S.A.